

6mm Ultra-Thin Magnetic Track Light

Upgraded Appearance

PRODUCT DETAILS



Grille Light



Flood Light



Folding Light




Track Light




Dropline Light

5W 12W Magnetic Track Folding Grille Light


Structure & size

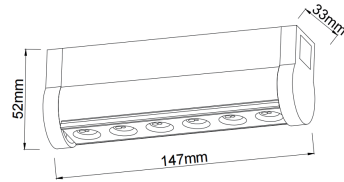


Model No. TX2430-5

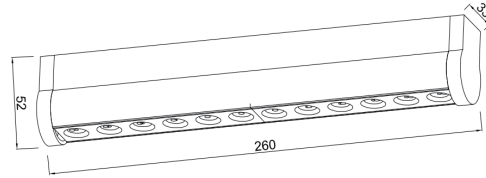

Model No. TX2440-12

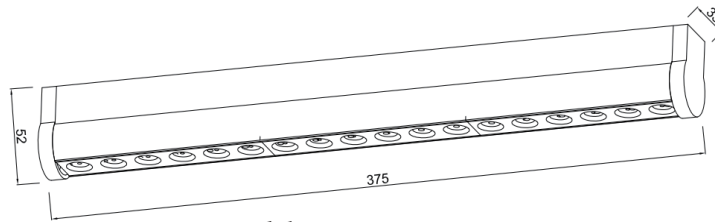

Model No. TX2430-16

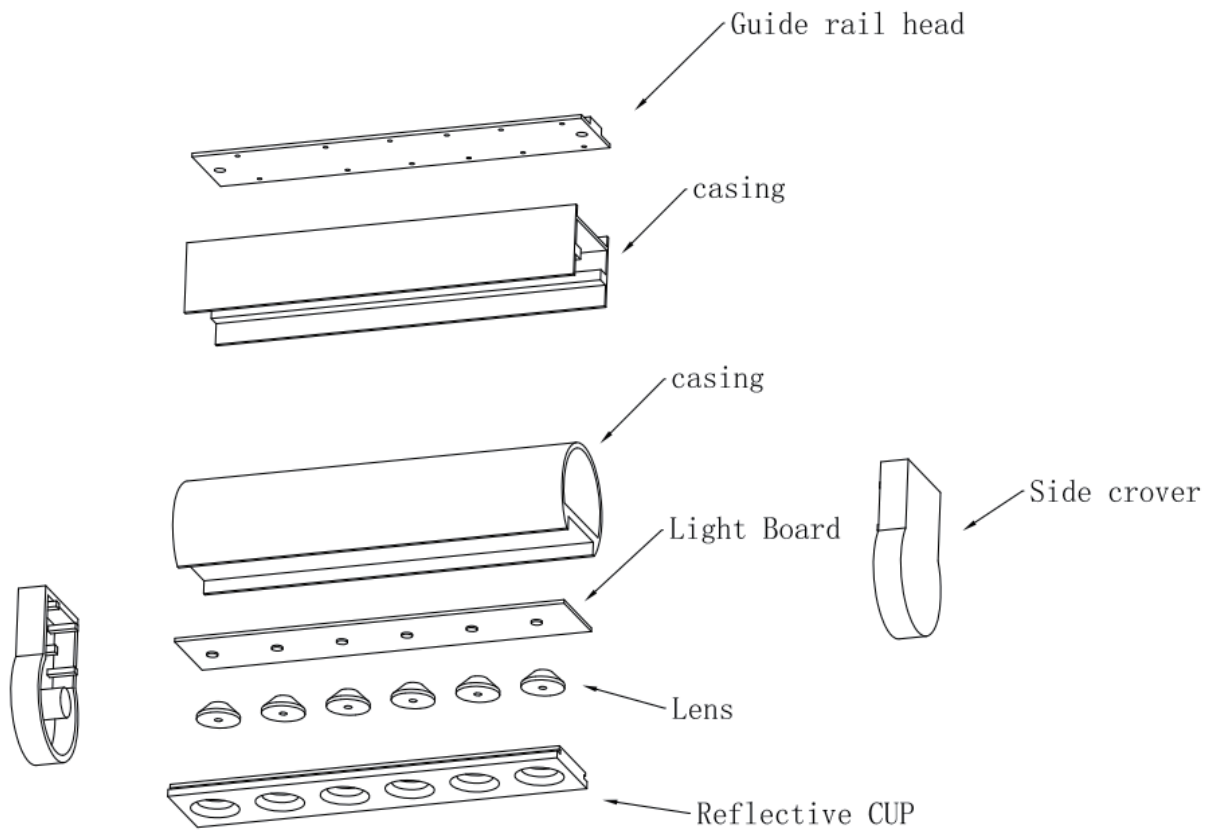

Performance & parameter of product


	Model No.	TX2430-5			TX2440-12			TX2450-16			
	lamp	warm white	natural white	cool white	warm white	natural white	cool white	warm white	natural white	cool white	
performance parameter	lumen (lm)	650	680	700	1300	1320	1350	1800	1840	1860	
	color temperature (K)	3000K	4200K	6500K	3000K	4200K	6500K	3000K	4200K	6500K	
	CRI	>80			>80			>80			
	type of LED	SMD			SMD			SMD			
	beam angle	34			34			34			
	decay rate (%)	1000 hours no more than 3%			1000 hours no more than 3%			1000 hours no more than 3%			
	total power (W)	5W			12W			16W			
	lifespan (Hrs)	≥30000Hrs			≥30000Hrs			≥30000Hrs			
	high voltage testing	500Vac/1min			500Vac/1min			500Vac/1min			
	LED parameter	lighting efficiency	130lm/W			110lm/W			115lm/W		
		chip quantity	6			12			16		
series-parallel way		1B6C			2B6C			2B8C			
voltage		48V			48V			48V			
current		300mA			300mA			300mA			
driver parameter	input parameter	48V DC			48V DC			48V DC			
	power factor	>0.5			>0.5			>0.5			
	output parameter	50V			50V			50V			
structure parameter	material	AL+PC			AL+PC			AL+PC			
	dimension	147X33X52mm			260X33X52mm			375X33X52mm			
	cut-out	/			/			/			
	protection class	calss III			calss III			calss III			
	IP	IP20			IP20			IP20			

Installation instructions


Installation instructions:

1. Switch off the power.
2. Install the luminaire into the guide rail groove .
3. Check that everything is in order .
4. Switch on the power if above steps done properly without any mistakes.


1

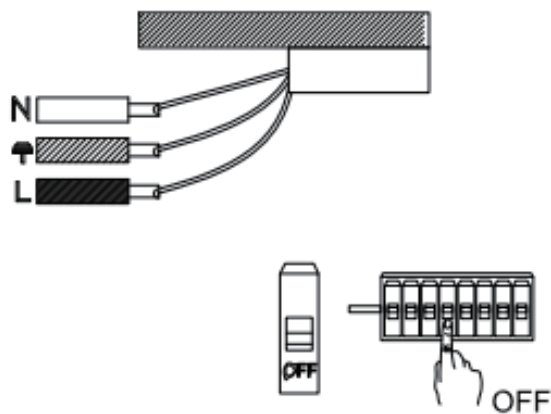

2

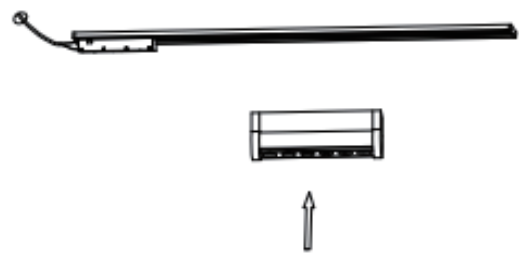

3

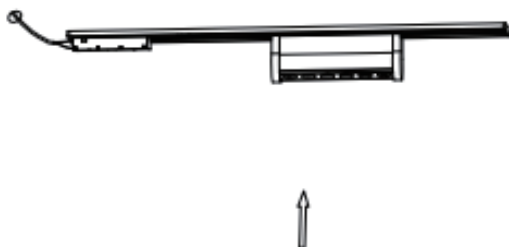

4

