

LED WALL LIGHT



2year
warranty



LBD0643-10

PRODUCT DETAILS



- Waterproof IP65 both indoor & outdoor use and dust resistant
- Full Anti-UV PC body, very safe. It can not be shocked by electricity.

APPLICATION



- Application:
hotel、home-lighting、recreation place、supermarket、office building





Search **oteshen lighting** to follow us:



Scan the catalogue for more products:



<http://www.oteshen.com>

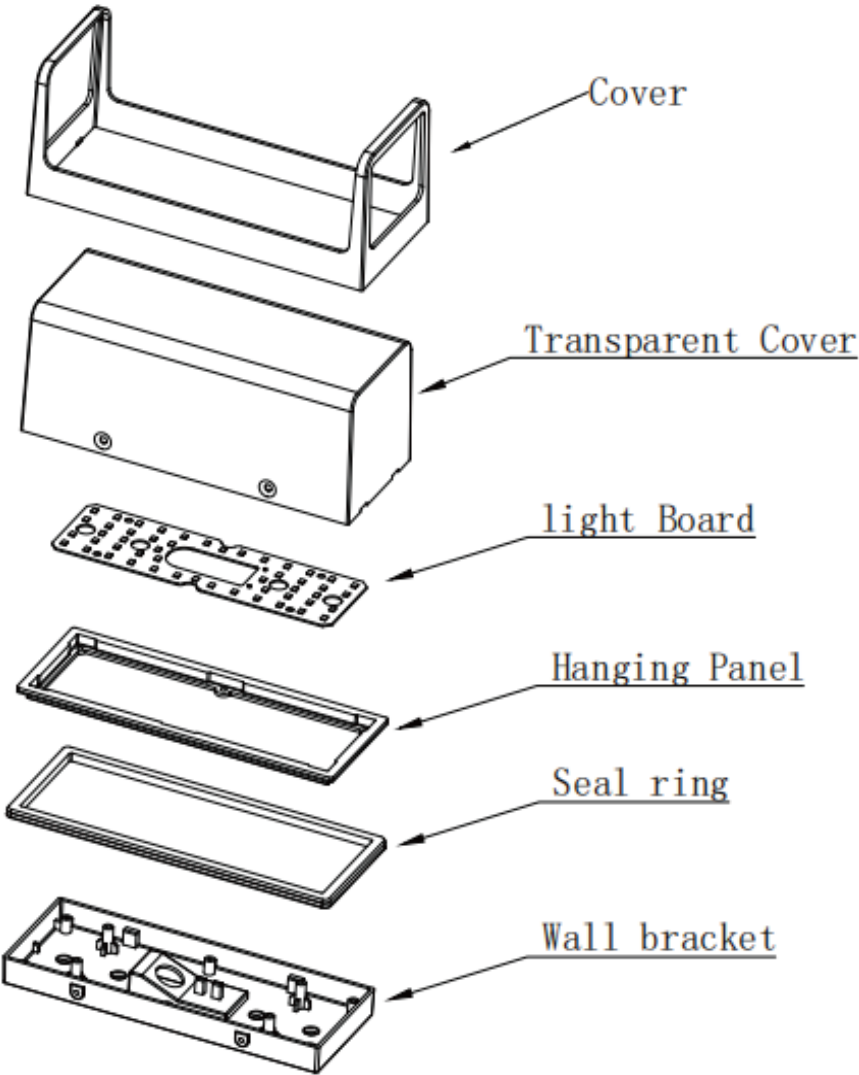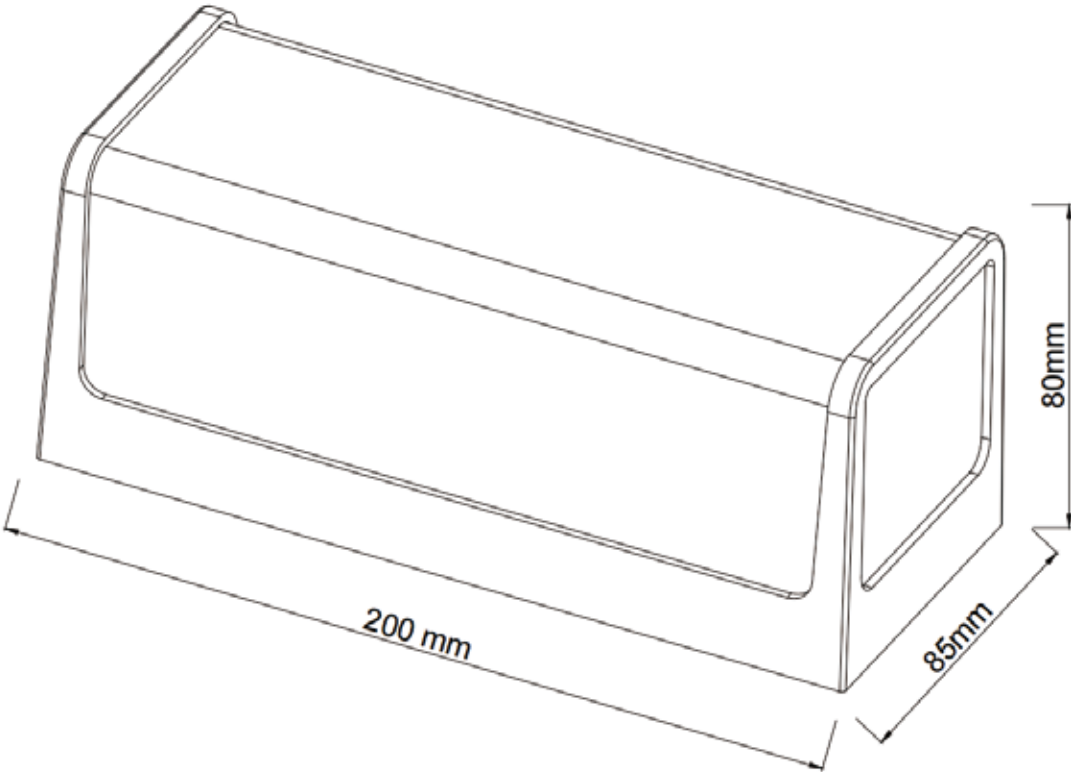


Performance & parameter of product

performance parameter	lamp	warm white	natural white	cool white
	lumen (lm)	800 lm	810lm	830lm
	color temperature (K)	3000K	4200K	6500K
	CRI	≥80		
	type of LED	SMD LED		
	beam angle	160 °		
	decay rate (%)	less than 3% within 1000 working hours		
	total power (W)	10W		
	lifespan (Hrs)	≥30000Hrs		
	high voltage testing	3750Vac/1min		
LED parameter	lighting efficiency	80Lm/W		
	chip quantity	48PCS		
	series-parallel way	24C2B		
	voltage			
	current			
driver parameter	input parameter	100-265V, 50/60Hz		
	power factor	0.5		
	output parameter	300MA±5% 30-80V		
structure parameter	material	PC		
	dimension	200X85X80mm		
	cut-out	\		
	protection class	calss I		
	IP	IP65		
environment parameter	application	hotel、home-lighting、recreation place、supermarket、office building		
	operating temperature	-25℃ ~ 50℃、10% ~ 90% R.H.		
	storage temperature	-30℃ ~ 85℃、0% ~ 95% R.H.		


INSTALLATION INSTRUCTIONS:

1. Turn off the power switch; (Fig. 1)
2. Punch holes in the ceiling according to their location (Fig. 2)
3. Attach the plastic pellets and screw in the mounting bracket (figure 3)
4. Install the luminaire and screw it onto the mounting bracket; (Fig. 4).
5. Assemble the light source and front ring into the lamp housing in the illustrated order (Fig. 5)
6. Check it and then switch it on. (figure 6)


1




2

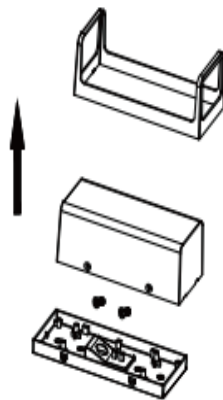


3

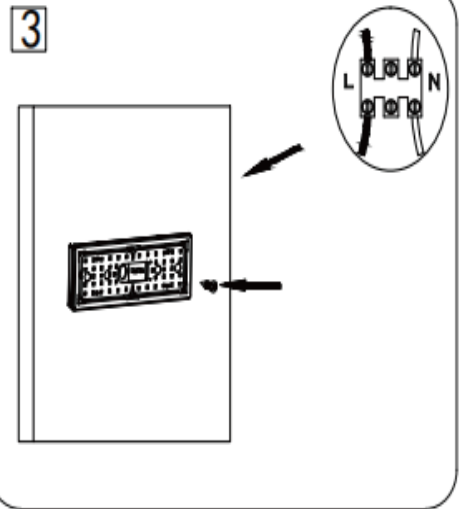

4



5



6

